


USTN

Transition Fittings HD-PE/Steel with male thread

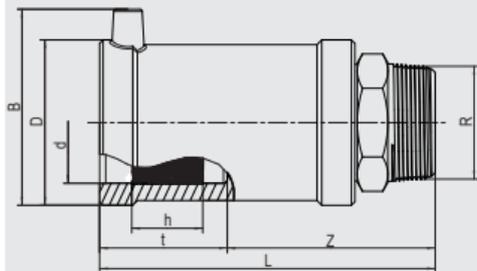

Compact transition fitting. HD-PE end with exposed heating coils for optimal heat transfer, large insertion depth, wide fusion zone plus cold zones at the end and in the transition area to prevent the flow of molten material for use without holding devices. Steel end permanently anchored in the HD-PE. Self sealing patented sealing geometry without elastomer seal. For use in gas systems.

Other thread sizes on request

PE 100 SDR 11

Maximum working pressure 5 bar (gas)



d	R	Order Ref.	Stock-status	BX	PU	D	L	Weight kg/each
32	1''	612580	1	20	1080	47	119	0.345
40	1 1/4''	612582	1	20	800	58	131	0.530
50	1 1/2''	612584	1	15	600	70	146	0.700
63	2''	612586	1	10	400	84	152	1.050